

Make in India Made for World



REALTIME[®]
Power of Biometrics

Experience the best technology in **SOLAR 4G CAMERA**



Model
C 9 eco 



**2 Days
Battery backup**



Fast Charging



Cloud Recording



360° Rotation



Color Night Vision



**256 GB
Support SD Card**

go 
GREEN
solar powered 4G camera


www.realtimebiometrics.com

Features

- 4MP pan/tilt **Smart C9 eco PTZ Camera**
- Horizontal rotation of 355 degrees, vertical rotation of 90 degrees
- Built-in high-sensitivity MIC and Speaker, support two-way audio
- With white light and infrared light, support Two night vision mode : B/W mode, full color mode
- Support human detection. The device can turn on white light when someone into the monitoring area.
- and the Realtime alarm push information is sent on mobile app
- Motion tracking. When a human figure is detected will be track automatically
- Built-in siren. siren will be trigger when human movement is detected. The voice of the siren can be customized.
- Built-in PIR sensor
- Built-in Battery 10400mAh Rechargeable lithium battery, with 3.5W solar panel
- Unique with All Time Real Color Vision
- Support Micro SD Card Up to 256GB & Cloud Storage (Optional)
- 4G Connection, scan the QR code to easily connect the camera
- Support monitoring : PC/Mobile on Realtime Cloud
- IP 66 Waterproof Rating, 4000 Lightning Protection
- Compression : H.264 / H.265 / H.265+
- Realtime Smart APP (Available on Play Store & iOS)



Main Function :

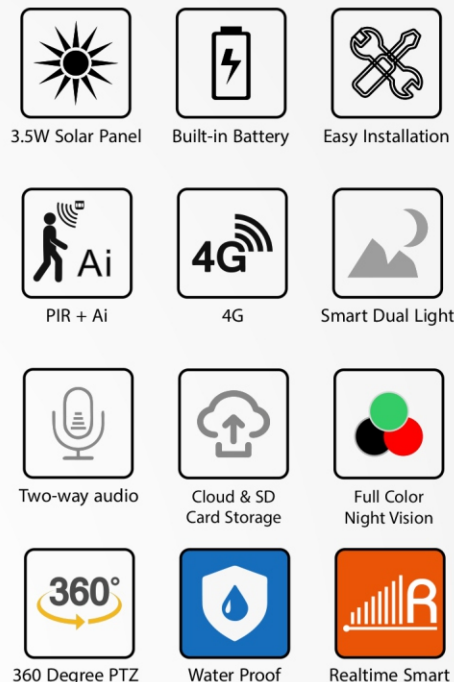

Download "Realtime Smart"



Technical Specifications

Image Sensor	1/2.8" CMOS Sensor
Resolution	4MP:2560 x 1440
Video Compression Standard	H.264+ / H.265 / H.265+
Lens	4mm @ F2.0, View angle: Horizontal 88.9° , Vertical 47.5° , 106.3° Diagonal
Infrared LED	4 LED
Infrared IR Distance	40 Meters
White LED	4 LED
White IR Distance	20 Meters
Light Mode	Full color / Infrared
Minimum Illumination	Color : 0.01Lux, Black and White : 0.001 Lux
Video Encode Stream	Main stream : 2304x1296 / 15FPS; Substream: 640x360 / 15FPS
PTZ Rotation Range	Horizontal 355° 0.1°~20°/sec, Vertical 105° 0.1°-20°/sec;
Audio Input / Output	Supports two-way audio, built-in microphone and speaker
Audio Compression Standard	AAC / G711A
WDR	Support DWDR
Electronics Shutter	Auto
4G Frequency Band	FDD-LTE : B1/ B3/ B5/ B8; TDD-LTE : B34/ B38/ B39/ B40/ B41;
PIR Detection	8-10 Meter
Alarm	1) Motion Detection, Alarm Picture Push 2) Human Detection
Monitoring	Android & iPhone / Windows PC