


Standalone Access Control System

A21
(with Realtime
Smart APP)



A22
(with Realtime
Smart APP)

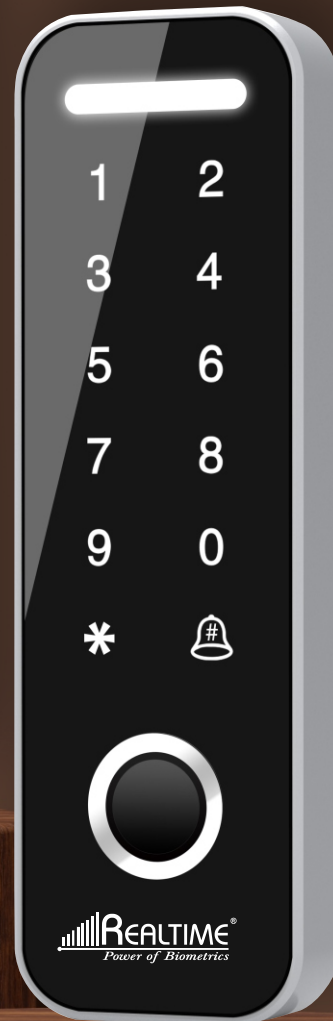

Realtime Smart APP



Realtime Standalone Access Control System



Realtime A21 (with Realtime Smart APP)



"Realtime Smart"



Realtime K2 (with Realtime Smart APP)



Specifications

» Fingerprint Sensor	Capacitive Sensor (7 Pin, KFP112 BA 01)
» Card	Supported 13.56 M IC Card
» Keyboard	12pcs
» Exit Button Input	Supported
» Door Relay	Supported
» Audio Output	Supported
» Working Voltage	DC9V~12V (Current : Below1A)
» Working Temperature	-10°C~+60°C
» Working Humidity	20% ~ 80%
» User Capacity	1000 (4M Flash)
» Fingerprint Capacity	100
» Identify Mode	Fingerprint, Card and Password (Combination)



Fingerprint Scanner



RF Card



Password




Access Control



"Realtime Smart"

configuration

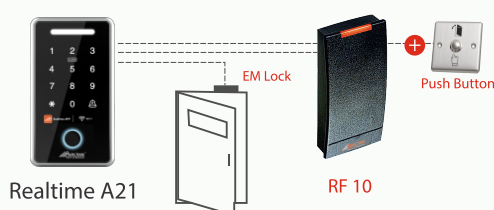

configuration

